

Tree Search Architecture for List SC Decoding of Polar Codes

Alexios Balatsoukas-Stimming, *Student Member, IEEE*, and Andreas Burg, *Member, IEEE*

Abstract—We present algorithmic improvements and a hardware architecture for list SC decoding of polar codes. More specifically, we show how to completely avoid copying of the log-likelihoods, which is algorithmically the most cumbersome part of list SC decoding. The hardware architecture was synthesized using a UMC 90nm VLSI technology, resulting in a decoder which can achieve a coded throughput of up to 103 Mbps.

Index Terms—Polar codes, list SC decoding, VLSI.

I. INTRODUCTION

CHANNEL polarization gives rise to an elegant and provably good class of channel codes, called *polar codes* [1]. The main idea behind polar codes is that, by using a simple polarizing transform on a channel n times, we can construct $N = 2^n$ channels that are either better (in terms of mutual information) or worse than the original channel. It was shown by Arıkan in [1] that, as n is increased, almost all channels become either perfect (i.e., noiseless) or completely useless. Furthermore, the fraction of noiseless channels goes to the mutual information between the input and the output of the original channel. This gives rise to the following uniform capacity achieving coding scheme for binary input channels: use the noiseless channels to transmit information and fix the input of the useless channels to some value which is known to both transmitter and receiver.

Decoding of polar codes is usually performed using a successive cancellation (SC) decoder with complexity $O(N \log N)$. Hardware architectures for SC decoding of polar codes were discussed in [2] and [3], while the first ASIC of such a decoder was presented in [4]. Recently, more sophisticated decoding algorithms, such as the list SC decoder [5], [6] and the stack SC decoder [7], were introduced. These algorithms provide improved error correcting performance at the cost of increased complexity. Unfortunately, the list SC decoder is heavily burdened by a likelihood copying step and no architecture of such a decoder exists yet in the literature.

Contribution and Outline: This letter presents an architecture for list SC decoding of polar codes. To this end, we also describe how the copying of the intermediate likelihoods in the list SC decoding algorithm can be avoided completely. In Section II, we briefly review the construction and decoding of polar codes. Section III discusses algorithmic improvements, while in Section IV the proposed list SC decoder architecture is presented. Section V summarizes VLSI implementation results and Section VI concludes this letter.

II. POLAR CODES

Following the notation of [1], we use a_1^N to denote a row vector $(a_1, \dots, a_N)$ and a_i^j to denote the subvector

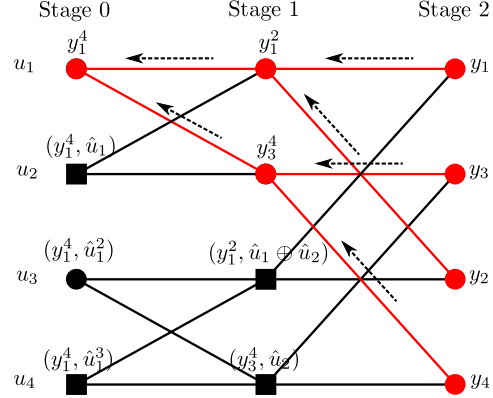


Fig. 1. SC decoding of bit 1 with $N = 4$.

$(a_i, \dots, a_j)$. If $j < i$, then the subvector a_i^j is empty. We use $\log$ and $\ln$ for the binary and natural logarithm, respectively.

Let W denote a binary input discrete and memoryless channel (B-DMC) with input $x \in \{0, 1\}$, output $y \in \mathcal{Y}$, and transition probabilities $W(y|x)$. A polar code is constructed by recursively applying a polarizing transform the channel W n times. This transform is linear and it can be expressed as a 2×2 matrix, denoted by F . The n -fold application of this transform can be expressed as an $N \times N$ matrix G , with $G = F^{\otimes n}$, where $\otimes$ denotes the Kronecker product. Encoding is performed by choosing an information sequence $u_1^N \in \{0, 1\}^N$ and calculating the codeword $x_1^N = u_1^N G$. This codeword is transmitted over W and a noisy codeword y_1^N is received.

A. SC Decoding

The decoding method proposed by Arıkan is based on successive cancellation. First, an estimate for u_1 , denoted by $\hat{u}_1$, is calculated based on y_1^N . Then, u_2 is decoded, based on y_1^N and the knowledge of $\hat{u}_1$, etc. In principle, it is possible to calculate the mutual information between (y_1^N, u_1^{i-1}) and u_i for every i . A polar code of rate R is constructed by letting the NR u_i 's with the highest mutual information convey information, while freezing the remaining u_i 's to some known value. If W is symmetric, then the frozen value can be 0 for all frozen u_i 's and the resulting polar code is a linear block code. The exact decoding procedure is dictated by the recursive structure of the code. In Fig. 1, the decoding process is visualized for $N = 4$. On the right side of the graph, the likelihoods $W(y_i|x_i)$, $i \in 1, \dots, N$, $x_i \in \{0, 1\}$ are available. These likelihoods are combined pair-wise by going through a data

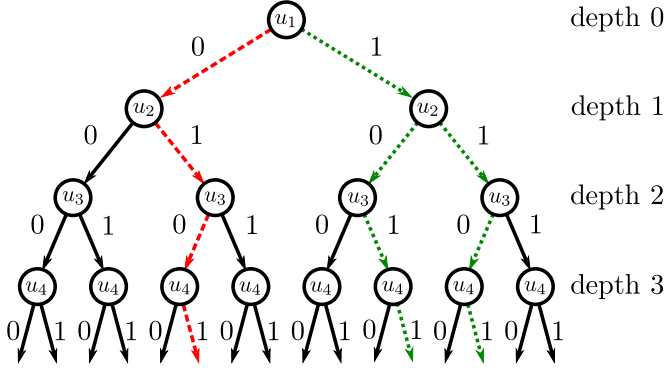


Fig. 2. Decoding tree for $N = 4$.

dependency graph with $N \log N$ nodes. The output on the left side of the graph is $P(y_1^N, \hat{u}_1^{i-1} | u_i)$, $u_i = 0, 1$, $i = 1, \dots, N$. Decisions for non-frozen bits are taken according to the maximum likelihood (ML) rule

$$\hat{u}_i = \arg \max_{u_i \in \{0,1\}} P(y_1^N, \hat{u}_1^{i-1} | u_i). \quad (1)$$

For frozen bits, the frozen value is used as a decision. The circles and squares in Fig. 1 represent the two ways in which the two pairs of incoming likelihoods at each node, denoted by a_1^2 and b_1^2 , are combined in order to produce the intermediate likelihoods, i.e., the functions $f : [0, 1]^4 \rightarrow [0, 1]^2$ and $g : [0, 1]^4 \times \{0, 1\} \rightarrow [0, 1]^2$ with [1]

$$f(a_1^2, b_1^2) = \left(\frac{1}{2} (a_1 b_1 + a_1 b_2), \frac{1}{2} (a_2 b_1 + a_2 b_2) \right), \quad (2)$$

$$g(a_1^2, b_1^2, u_s) = \left(\frac{1}{2} a_{1+u_s} b_1, \frac{1}{2} a_{2-u_s} b_2 \right), \quad (3)$$

where u_s is called a *partial sum*. Each partial sum is a linear combination of some of the previously decoded codeword bits [1]. If intermediate likelihoods are stored to avoid recalculations, then each node is activated only once. Thus, exactly $N \log N$ applications of (2) or (3) are needed and the computational complexity of SC decoding is $O(N \log N)$.

B. List SC Decoding

Successive decoding can be described as a search procedure on a full binary tree. The $2^{(i-1)}$ nodes at depth $(i-1)$ represent u_i given all possible choices for $\hat{u}_1^{i-1}$. The two outgoing edges of each node are labeled with the two possible choices for $\hat{u}_i$. A decoder explores one or more paths in the tree by deciding which edge to follow at each step based on some metric. The SC decoder, for example, explores only a single path from the root to the leaves of the tree. It uses the likelihood in (1) as a metric for non-frozen bits and it always follows the edge corresponding to the frozen value for frozen bits. An example is illustrated by the dashed red line in Fig. 2. The SC decoder has the drawback that erroneous decisions at some point can never be recovered in the future. The list SC decoder, on the other hand, performs a breadth-first search (BFS) on the tree under a complexity constraint. This constraint is enforced by discarding some of the paths at each step. More specifically, the list SC decoder with list

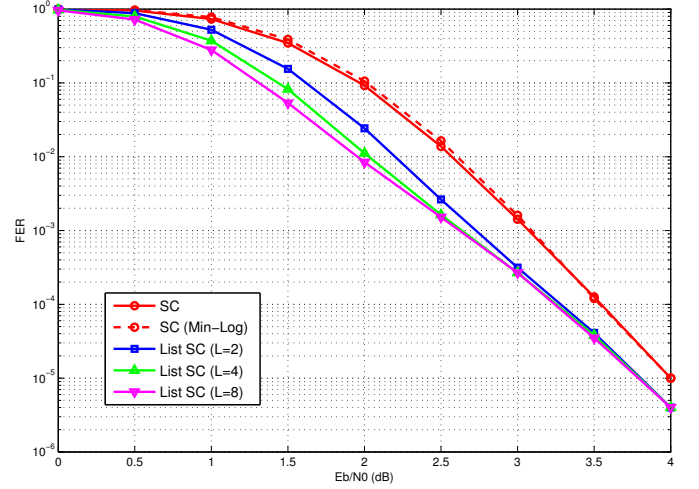


Fig. 3. Frame error rate (FER) performance of a polar code of length $N = 1024$ bits under SC and list SC decoding with various list sizes.

size L keeps track of L paths simultaneously. The list SC decoder also uses the likelihood in (1) as a metric for non-frozen bits. More formally, let $(\hat{u}_1^{i-1}(1), \dots, \hat{u}_1^{i-1}(L))$ denote the L distinct decoding paths after the $(i-1)$ -th bit has been decoded. For every path $l \in 1, \dots, L$, there are two choices for $\hat{u}_i(l)$. Out of the resulting $2L$ paths, the L paths with the highest metric are preserved. When bit N is reached, the path with the highest metric is declared as the decoded codeword. A possible decoding trajectory for a list SC decoder with $L = 2$ is shown by the green dotted line in Fig. 2.

The performance of list SC decoding for $N = 1024$ and for some realistic list sizes is compared with the performance of SC decoding in Fig. 3. We observe that the returns of increased list size are small for $L > 4$ and that at high SNR, using $L > 2$ provides almost no gain. However, at a FER of 10^{-2} , which is the target FER for many communications standards, the gain of list SC decoding is more prominent.

III. ALGORITHMIC CONSIDERATIONS

The list SC decoder can be thought of as a combination of components. There are L metric computation units (MCUs) which calculate the metrics for each path using the sequential SC procedure. The MCUs have a memory which stores the intermediate likelihoods, the partial sums that correspond to each path, and the path itself. We call these three memories collectively the *state* of the MCU. Moreover, there is a component that manages the tree search by performing *path selection* based on the metrics that are calculated by the MCUs.

A. Improved State Copying

After the path selection step, each of the initial L paths is either discarded, kept, or duplicated, depending on whether it has zero, one, or two children nodes in the set of L largest metrics, respectively. In order to duplicate a path, the state of its associated MCU is copied to another MCU, with slight differences between the two copies that correspond to the two different values of $\hat{u}_i$. It was shown in [5] that list SC decoding

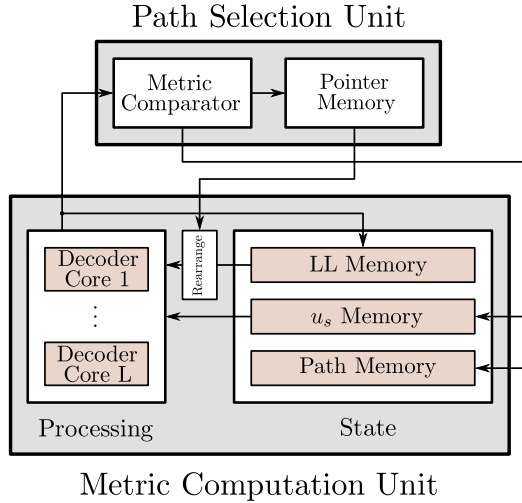


Fig. 4. Overview of the proposed list SC decoder architecture.

can be performed with complexity $O(LN \log N)$ when using a *lazy copy* technique for state copying. However, there is no need to copy the intermediate likelihoods at all. If the intermediate likelihoods are stored in L memories, then each MCU only needs to know which memory to read from at each stage of SC decoding. Note that, since the channel likelihoods are never overwritten, only one copy is needed and all MCUs can read from this one copy. Moreover, the values calculated at stage 0 needed only once, so they are not stored.

For example, consider the code in Fig. 1. The path selection unit only needs to track where each MCU has to read from at stage 1. Assume that $L = 2$, that decoding has just started, that u_1, u_3 are non-frozen and that u_2, u_4 are frozen. List SC decoding starts with one (empty) path whose associated MCU reads from the first memory. When the MCU has finished calculating the metric, this path will be split into 2 paths, one for each choice of $\hat{u}_1$. Now the MCUs for *both* resulting paths have to read from the first memory at all stages of SC decoding, but the first and second MCUs write their output back to the first and second state memory, respectively. So, the correct likelihoods for the second MCU for the stages that are being processed from this point on are in the second memory. Since u_2 is frozen, we simply extend both paths with the frozen bit value and continue to u_3 . To decode u_3 , SC decoding goes back to stage 2 and uses the channel likelihoods to compute the likelihoods at stage 1. After stage 2 has been processed, the correct likelihoods for the second MCU at stage 1 are stored in the second memory. The second MCU is informed that at stage 1 it has to read from the second memory by means of an auxiliary memory of dimension $L \times (\log N - 2)$, which is called the *pointer* memory. The index of the memory that each MCU has to read from at each stage is stored in this memory. With this modification, instead of copying the intermediate likelihoods, it suffices to copy between the rows of this very small auxiliary memory.

B. Likelihood Representation

We represent the likelihoods in their negative log-likelihood (LL) form. This simplifies the computations in (2) and (3), pro-

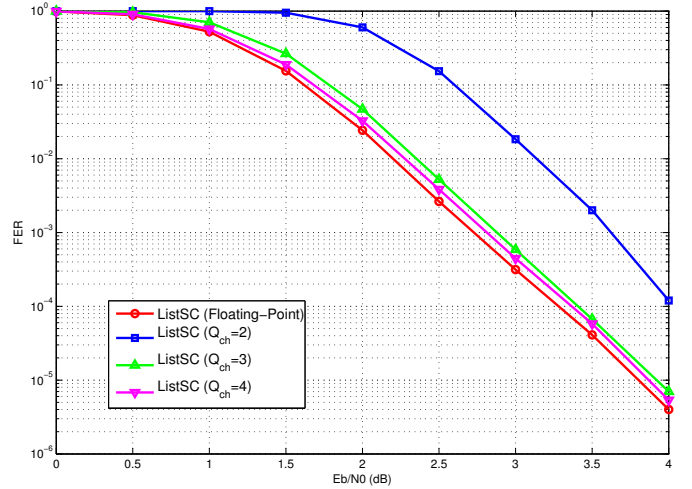


Fig. 5. FER performance of a polar code of length $N = 1024$ bits under floating-point and fixed-point list SC decoding for $L = 2$.

vides numerical stability, and eases the binary representation because the LLs are non-negative numbers. More specifically, we use $-\ln W(y_i|x_i)$, $x_i = 0, 1$, $i = 1, \dots, N$. Using this representation, (2) and (3) become

$$f(a_1^2, b_1^2) = (\min^*(a_1 + b_1, a_2 + b_2), \min^*(a_2 + b_1, a_1 + b_2)), \quad (4)$$

$$g(a_1^2, b_1^2, u_s) = (a_1 + u_s + b_1, a_2 - u_s + b_2), \quad (5)$$

where $\min^*(a, b) = \min(a, b) + \ln(1 + e^{-|a-b|})$. The f function is simplified by using an approximation that ignores the transcendental $\ln(\cdot)$ term. In Fig. 3, the performance of the list SC decoder when using this approximation is plotted using a dashed line. It can be seen that there is practically no loss in performance with respect to the exact implementation.

IV. LIST SC DECODER ARCHITECTURE

An overview of the proposed VLSI architecture is presented in Fig. 4. The proposed VLSI architecture contains two main components, i.e., the MCUs and the path selection unit. As already described, the MCUs are responsible for calculating the path metrics, while the path selection unit manages the tree search. Each of the L MCUs is composed of the LL, partial sum and path memories, and of a *SC decoder core* which performs the metric update based on the state that it is given by the path selection unit. An additional unit is responsible for redirecting the correct LLs to each decoder core. The path selection unit contains a sorter which finds the L best metrics out of $2L$ options, along with the path index and the value of $\hat{u}_i(l)$ from which they resulted. It also contains the pointer memory, which manages the memory read access of the decoder cores. A more detailed description of each unit follows.

A. LL Quantization

Since the LLs are positive numbers, as SC decoding moves towards stage 0, their dynamic range increases. When an LL pair overflows, it is useless for making a decision, since both

LLs will have the same value. Thus, when using LLs, it is crucial to avoid overflows. In (4) and (5), two numbers with the same dynamic range are added, so that all overflows can be avoided by increasing the number of bits used to store the LLs by one bit per stage. This way, the only performance degradation with respect to the floating point implementation comes from the quantization of the channel LLs. Let Q_{ch} denote the number of bits used for the quantization of the channel LLs. The performance of the list SC decoder under various quantization bit-widths is presented in Fig. 5. We observe that, if we set $Q_{ch} = 3$, then the degradation with respect to the floating point and to the $Q_{ch} = 4$ implementations is very small.

B. Metric Computation Units

1) *SC Decoder Cores*: The architecture of the SC decoder cores is based on the log-likelihood ratio (LLR) based architecture of [4] with a modification to implement LL based SC decoding, because the path metrics can not be extracted from an LLR based decoder. Each decoder core consists of P processing elements (PEs) that operate on up to P nodes of each stage in parallel. The maximum bit-width, denoted by $B_{\max}$, determines the width of the PEs. We have $B_{\max} = Q_{ch} + \log N$. The PEs implement both (4) and (5). An additional input is used to choose between the f and g outputs, depending on which function is needed at each stage.

2) *Memories*: SC decoding can be implemented by using $2N$ memory positions [4]. The N first positions that correspond to the channel LLs are never overwritten during SC decoding. Thus, only one copy of the channel LL memory is needed, from which all decoder cores can read. The remaining N memory positions for each decoder core have to be distinct. So, the number of required memory positions is $(L+1)N$ and the total number of bits, denoted by B_{tot} , is

$$B_{\text{tot}} = (2L + 2)NQ_{ch} + 4LN - 2L(\log N + Q_{ch} + 2). \quad (6)$$

There are L partial sum and path memories, with N memory positions of 1 bit each. In order to complete the state copying step in a single cycle, all the contents of each of the L partial sum memories can be copied to and from one another by means of crossbars. The same holds for the path memories.

C. Path Selection Component

1) *Metric Comparator*: For the path selection step, the $2L$ metrics are sorted in a single cycle. To minimize the delay, a radix- $2L$ sorter was used. This sorter requires $2L(2L - 1)/2$ comparators of $B_{\max}$ -bit quantities. Since a single sorter is needed, minimizing its size is not critical. In fact, the metric sorter occupies only 0.1% and 0.8% of the total decoder area for $L = 2$ and $L = 4$, respectively. A register was added between the output of the decoder cores and the metric sorter in order to reduce the length of the critical path. Unfortunately, because decoding can not proceed before the choice of paths is made, we effectively introduce an idle cycle every time the output of the metric sorter is needed. This happens RN times

TABLE I
SYNTHESIS RESULTS FOR $N = 1024$.

Algorithm	Proposed Architecture		[4] ¹
	List SC	SC	
List Size	$L = 2$	$L = 4$	n/a
Cell Area	1.60 mm ²	3.53 mm ²	1.72 mm ²
Norm. Cell Area	1.60 mm ²	3.53 mm ²	0.43 mm ²
Clock Frequency	266 MHz	230 MHz	150 MHz
Coded Throughput	103 Mbps	89 Mbps	98 Mbps
Technology	UMC 90 nm	UMC 90 nm	UMC 180 nm

¹ Size is reported for a fabricated chip.

per codeword. Thus, by modifying the expression found in [4], the number of cycles required to decode one codeword is

$$C_{\text{list}} = (2 + R)N + \frac{N}{P} \log \frac{N}{4P}. \quad (7)$$

If we ignore the second term, which is small, then the overhead with respect to the case where we do not add a register is RN cycles. Nevertheless, adding the register leads to a higher throughput due to a significantly higher clock frequency.

2) *Pointer Memory*: The pointer memory contains $L \times (\log N - 2)$ elements. Each element can take on L distinct values, so we need $\log L$ bits for the representation. In total, the pointer memory contains $L \log L (\log N - 2)$ bits. For $L = 2, 4$ and $N = 1024$, this translates to 16 and 64 bits, respectively. This memory also has the copying functionality that the partial sum and path memories provide.

V. VLSI SYNTHESIS RESULTS

Synthesis results for $N = 1024$ and $L = 2, 4$, using a UMC 90nm CMOS technology are shown in Table I. There exists no other list SC decoder in the literature, so we can only provide a comparison with the existing SC decoder.

VI. CONCLUSION

In this work, the first list SC decoder architecture in the literature was presented. It was also shown how to avoid copying of the intermediate likelihoods by copying between pointers instead of the actual values. The proposed architecture scales well and has a throughput overhead with respect to an SC decoder of slightly less than 50% percent.

REFERENCES

- [1] E. Arıkan, "Channel polarization: A method for constructing capacity-achieving codes for symmetric binary-input memoryless channels," *Trans. Inf. Theory*, vol. 55, no. 7, pp. 3051–3073, July 2009.
- [2] C. Leroux, I. Tal, A. Vardy, and W. Gross, "Hardware architectures for successive cancellation decoding of polar codes," in *IEEE Int. Conf. Acoustics, Speech and Sig. Process. (ICASSP 2011)*, May 2011, pp. 1665–1668.
- [3] C. Leroux, A. Raymond, G. Sarkis, and W. Gross, "A semi-parallel successive-cancellation decoder for polar codes," *IEEE Trans. Signal Process.*, vol. 61, no. 2, pp. 289–299, Jan. 2013.
- [4] A. Mishra, A. Raymond, L. Amaru, G. Sarkis, C. Leroux, P. Meinerzhagen, A. Burg, and W. Gross, "A successive cancellation decoder ASIC for a 1024-bit polar code in 180nm CMOS," in *Proc. Asian Solid-State Circuits Conf. 2012*, Nov. 2012.
- [5] I. Tal and A. Vardy, "List decoding of polar codes," in *Proc. IEEE Int. Symp. Inf. Theory (ISIT 2011)*, Aug. 2011, pp. 1–5.
- [6] K. Chen, K. Niu, and J. Lin, "List successive cancellation decoding of polar codes," *Electronics Letters*, vol. 48, no. 9, pp. 500–501, Apr. 2012.
- [7] K. Niu and K. Chen, "Stack decoding of polar codes," *Electronics Letters*, vol. 48, no. 12, pp. 695–697, June 2012.